




熱泵技術是...
HEATPUMP IS ...

能源效益極高的技術

冷暖變頻機的熱泵技術是目前最具成本效益的電力供暖方式，也是性能系數(COP)達4或以上的優質系統。即是要產生4千瓦特的供暖或製冷量時，系統平均只需使用少於1千瓦特電力。

Super Energy Efficiency

Heat Pumps are currently the most cost-effective form of heating using electricity and most good quality systems achieve COP (Coefficient of Performance) of four or more. This means that to achieve four kilowatts of heating or cooling power, they use an average of less than one kilowatt of electricity.

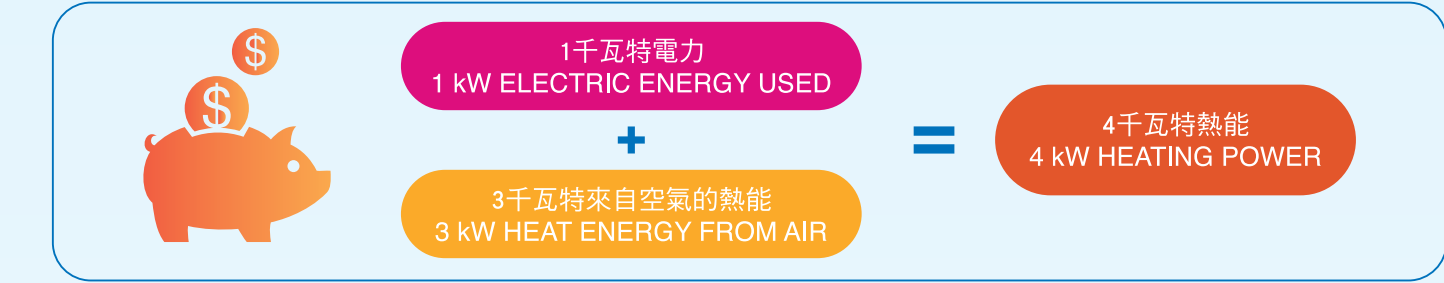

保障兒童安全

有別於燃氣供暖系統或火爐，熱泵系列不會產生火焰或灼熱的表面，避免兒童或寵物觸摸和燒傷。當您外出或睡覺時，也能繼續開啟系統，十分安全。

SAFER for children

Unlike gas heating or wood burners, there are no flames or hot surfaces that children or pets can touch and burn themselves on. They can also be safely left on while you're out or asleep.

節省空間

熱泵系統能提供製冷功能和供暖功能。無論任何季節，大部份人所適應的舒適溫度範圍非常狹窄（不論供暖或製冷也是攝氏20至25度），而每個人對溫暖或寒冷的定義也不同。熱泵系統讓您輕鬆控制及維持最適合自己的溫度。

SAVING space

HEAT PUMP CAN PROVIDE BOTH COOLING AND HEATING. Most of us are comfortable living within a small bandwidth of temperature all year round (20-25°C whether heating or cooling) we all have our own definition of warm enough or cool enough. A heat pump provides you with the ability to easily control and maintain your climate to your own exacting levels.

準確控制溫度

熱泵系統方便隨時調節房間溫度，只需輕輕一按，便可在數分鐘內切換供暖或製冷模式。當房間達至理想溫度後，系統會一直維持設定的溫度。

Control temp
PRECISELY

A heat pump enables you to increase or decrease the temperature of your room, or switch from heating to cooling in an instant at the push of a button within a few minutes. Once the room reaches your preferred temperature, the heat pump will maintain that temperature for as long as you require it to.

倍添舒適

...此外，由於熱泵能促進空氣循環，所以無論坐在房內任何角落，也可享受舒適體驗。系統更具備另一項實用功能，除了營造溫暖乾燥的舒適環境，更發揮空氣調節的作用，締造全面舒適享受。

& more COMFORT

...Also, there is no need to sit near the unit because the heat pump circulates air all over the room to benefits of everyone. And there's another function add up for your full comfort; A warm, dry, comfortable environment with the addition of air conditioning.



節約能源
Energy Saving



舒適享受
Comfortable



時尚外型
Stylish Panel



品質保證
Trusted Quality



R32
Refrigerant


HIGHLY
DURABLE
SPECIAL FOR
COASTAL AREA

STABILISER
FREE

INVERTER

				1HP	1.5HP	2HP	2.5HP	3HP
容量 Capacity	額定製冷量 Cooling rated		kW	2.5	3.5	5.0	6.0	7.1
			Btu/h	8,500	11,900	17,100	20,500	24,200
	最低 – 最高 Min – Max			3,400 - 11,600	4,100 - 13,000	5,500 - 20,500	5,500 - 22,900	7,200 - 25,600
	額定供暖量 Heating rated		kW	2.5	3.5	5.0	6.0	7.1
Btu/h			8,500	11,900	17,100	20,500	24,200	
最低 – 最高 Min – Max			3,400 - 11,600	4,100 - 13,000	5,500 - 20,500	5,500 - 22,900	7,200 - 25,600	
電源 Power supply				單相 1 phase, 220-240 V, 50 Hz				
運行電流 Running current	製冷 Cooling	額定 Rated	A	2.9	4.6	6.1	8.0	10.9
	供暖 Heating			3.0	4.6	6.1	8.3	10.9
耗電量 Power consumption	製冷 Cooling	額定 Rated	W	610	980	1,315	1,740	2,370
	供暖 Heating			610	980	1,315	1,740	2,370
製冷季節性表現系數 (CSPF)				5.74	5.03	5.95	5.38	5.17
製熱季節性表現系數 (HSPF)				5.07	4.91	4.18	4.72	4.35
室內機 INDOOR UNIT				FTHM25RAV1N	FTHM35RAV1N	FTHM50RAV1N	FTHM60RAV1N	FTHM71RAV1N
面板顏色 Front panel colour				亮白色 Shiny white				
排風量 (高) Airflow rate (H)	製冷 Cooling	m³/min (cfm)		10.2 (360)	10.7 (378)	18.2 (643)	18.2 (643)	20.1 (710)
	供暖 Heating			10.3 (364)	10.8 (381)	19.5 (689)	19.5 (689)	21.5 (759)
風速 Fan speed				五段風速、寧靜和自動 5 steps, quiet & automatic				
運轉音量 (高／中／低／超低) Sound levels (H / M / L / SL)	製冷 Cooling	dB(A)		40 / 35 / 29 / 25	41 / 36 / 30 / 26	44 / 40 / 35 / 28	44 / 41 / 36 / 30	46 / 42 / 37 / 31
	供暖 Heating			40 / 35 / 30 / 27	41 / 36 / 31 / 28	44 / 40 / 35 / 32	45 / 40 / 35 / 32	46 / 42 / 37 / 34
尺寸 Dimensions	高×闊×深 HxWxD	mm		285 x 770 x 226		295 x 990 x 266		
重量 Weight		kg		8		13		
室外機 OUTDOOR UNIT				RHM25RAV1N	RHM35RAV1N	RHM50RAV1N	RHM60RAV1N	RHM71RAV1N
機殼顏色 Casing colour				象牙白色 Ivory white				
壓縮機 Compressor				密封擺動式 Hermetically sealed swing type				
製冷劑 Refrigerant	馬達輸出 Motor output	W		700	700	1,200		1,300
	類型 Type			R32				
	製冷劑量 Charge	kg		0.70	0.70	1.00		1.05
運轉音量 (高／超低) Sound levels (H / SL)	製冷 Cooling	dB(A)		48 / 44	48 / 45	47 / 44	47 / 44	51 / 45
	供暖 Heating	dB(A)		48 / 44	48 / 45	48 / 45	49 / 45	52 / 46
尺寸 Dimension	高×闊×深 HxWxD	mm		550 x 658 x 275		595 x 845 x 300		
重量 Weight		kg		27		36		39
運轉範圍 Operation range	製冷 Cooling	°CDB		10.0 to 46.0				
	供暖 Heating	°CDB		2.0 to 20.0				
配管直徑 Piping connection	液態 Liquid	mm		ø6.4				
	氣態 Gas			ø9.5		ø12.7		ø15.9
	排水 Drain			ø16.0				
最長喉管長度 Max. piping length			m	15		30		
最高高低差 Max. level difference				12		20		

註：以上數值按照系統以220V 50Hz的電源運行為基礎。
測量條件：
1. 製冷量是以室內溫度27°CDB、19°CWB，以及室外溫度35°CDB為基礎，喉管長度為7.5米。
2. 運轉音量以第1點的溫度條件為基礎及測試距離為1米。這些數值為於無反響空間的轉換值，在實際運行時一般會受四周環境影響而稍高。
本文件所載的產品規格、設計及其他內容如有更改恕不另行通知。



大金冷氣(香港)有限公司
DAIKIN AIRCONDITIONING (HONG KONG) LTD.

香港九龍觀塘巧明街111-113號富利廣場17至18樓
17/F-18/F, Furuta Plaza, 111-113 How Ming Street,
Kwun Tong, Kowloon, Hong Kong

(852) 2570 2786 www.daikin.com.hk



經銷商/Dealer

DAIKIN

RACDDHK2019-1



R32
Refrigerant

NEXT
GENERATION
REFRIGERANT

COANDA
series

INVERTER

CSPF up to
5.95

根據ASHRAE STANDARD 34，R32屬於輕度易燃製冷劑。消費者如購買該類產品，請留意及確認室內機安裝高度及室內空間最少建築面積，應向供應商、代理商或具有處理相關雪種經驗的技術人員聯絡，安排進行安裝、檢查或維修。Consumers shall consult supplier, agents or his authorized technicians for installation, inspection and maintenance for this type of product. Consumers shall pay attention to installation height and minimum floor area for such product's indoor unit installation. R32 is classified as mildly flammable refrigerant according to ASHRAE STANDARD 34.

COANDA series

出色設計與卓越功能兼備
氣流柔和舒適，令馬達運作更順暢，同時節省電費
Where design come with function
Feel less draft without motor inconvenient & no additional energy cost


您聽過「康達（COANDA）」效應嗎？

康達效應是一個物理理論，解釋飛機能在空中飛行的原因，但我們不會深究這個範疇。
康達效應是指氣體或液體離開噴嘴後，會明顯靠向和跟隨附近的表面移動。大金利用這種傾向，將氣流對準牆身或天花板等表面。


If you ever heard about “COANDA”?

It's the physic theory that will explain how does the plane stay in the air, but we won't go that far.
Coanda effect is the observed tendency of a moving gas or fluid leaving a nozzle of some kind to cling and follow nearby surfaces. We utilize this tendency by aiming the airflow at room surfaces, such as walls or ceilings.


何謂康達效應？
What Is Coanda?

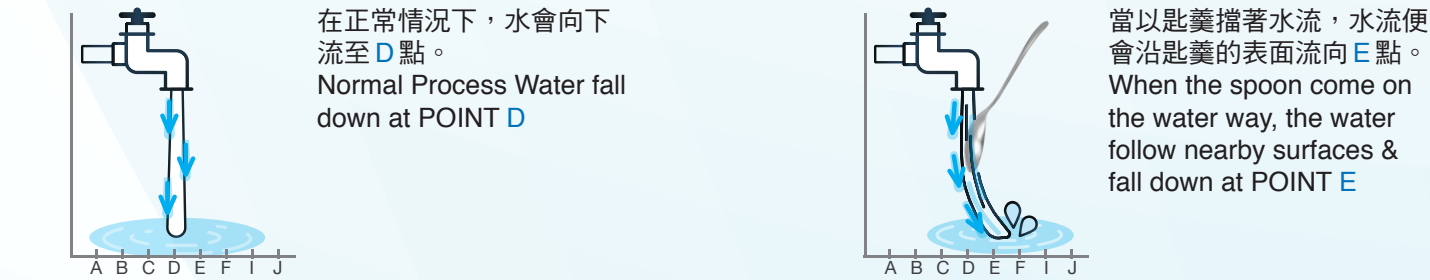

如何將康達效應應用於冷氣中？
If Apply Coanda In A/C?

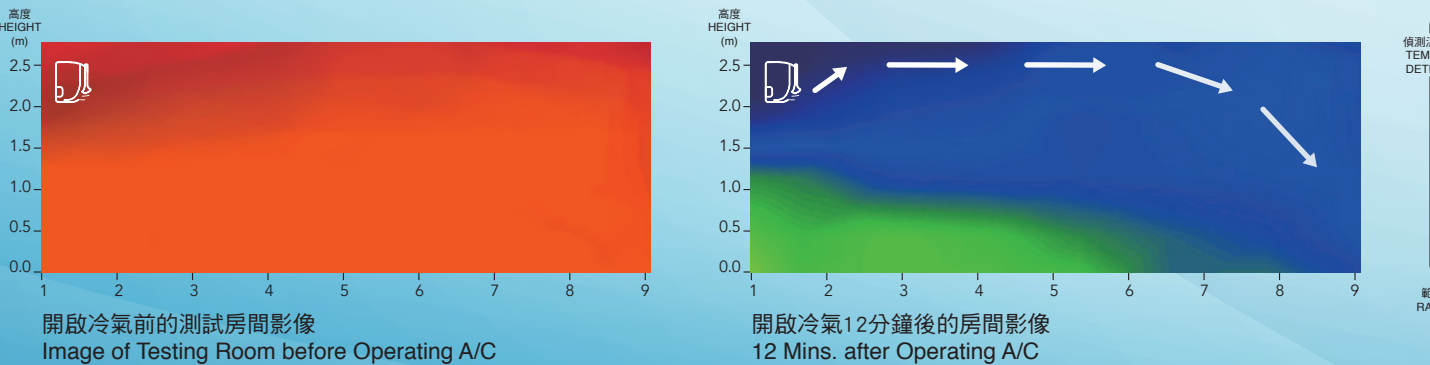

方便易用的遙控器
USER FRIENDLY REMOTE CONTROLLER

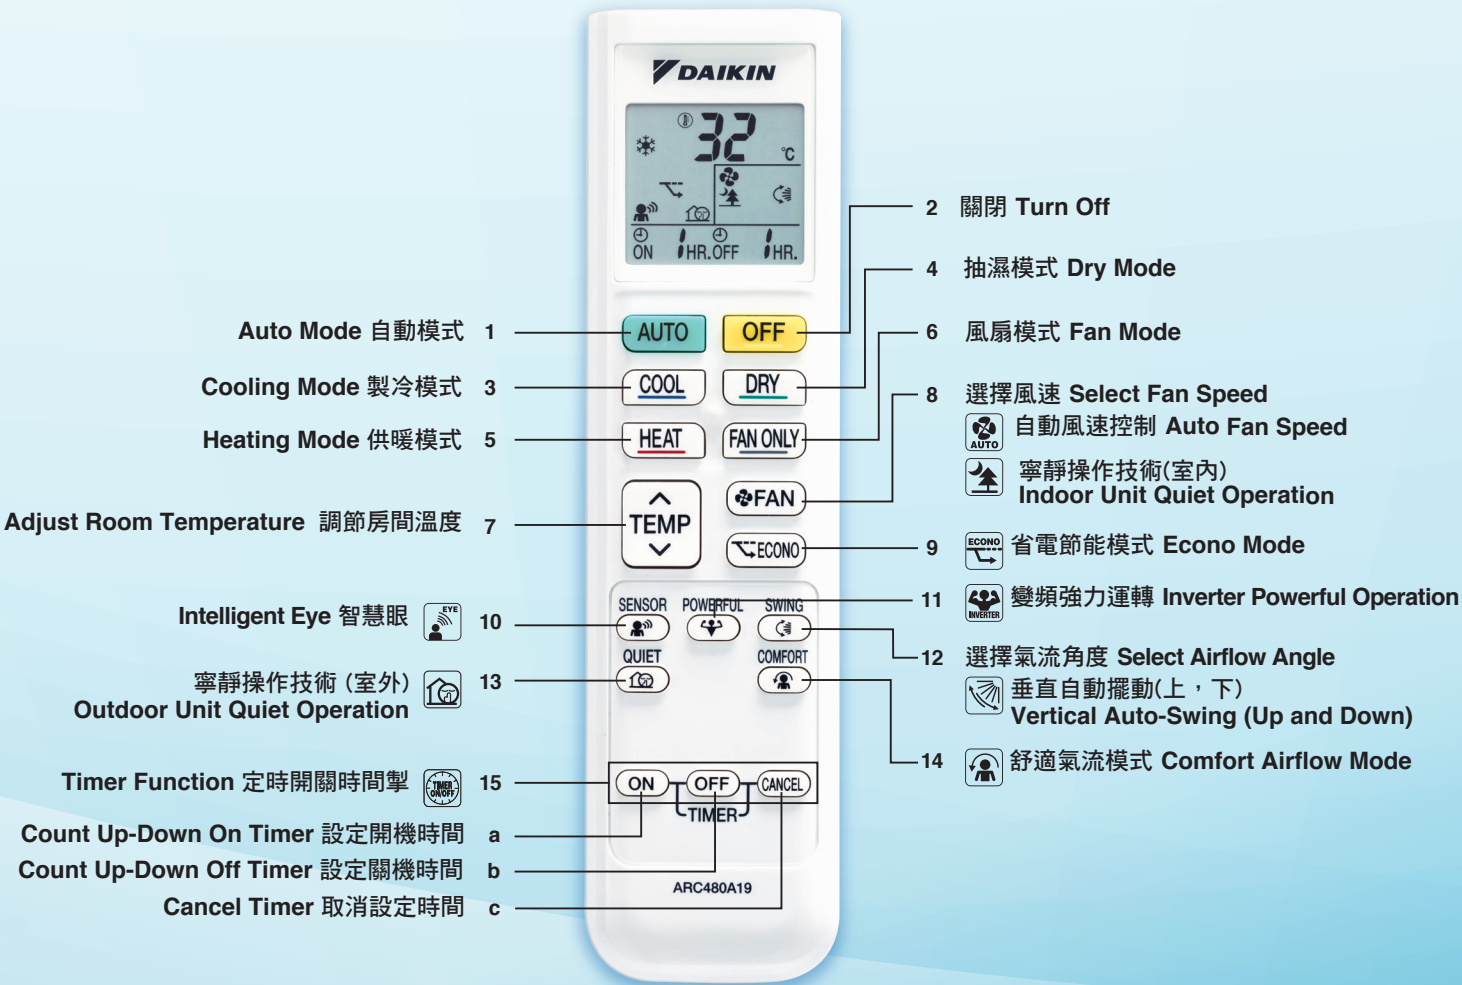


* 測試結果以特定測試環境為基礎。所有測試並非在實際使用情況下進行。
Tested results are based on specific testing conditions. All tests are not demonstrated under actual usage situation.




INVERTER

節省更多 加倍耐用
ENERGY- SAVING & DURABLE

變頻技術能有效節約能源，透過靈活控制馬達速度，減少冷氣的多餘運作。
An inverter is energy saving technology that eliminates wasted operation in air conditioners by efficiently controlling motor speed.

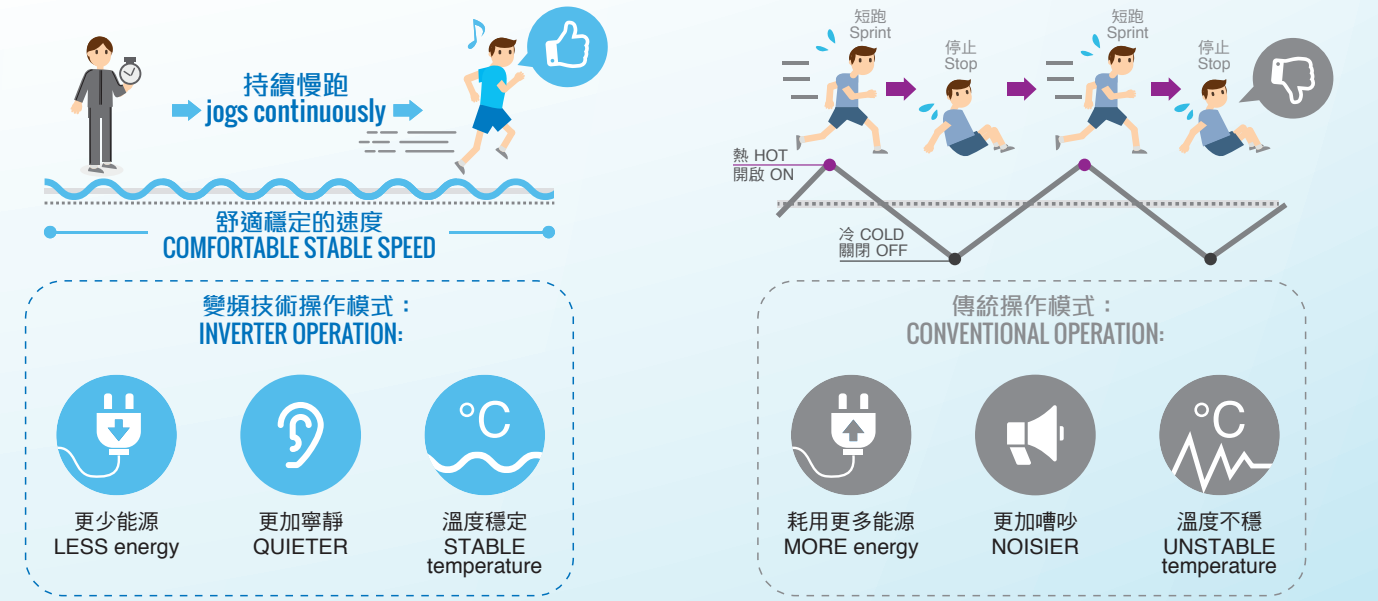


提供節能效果
SAVE MORE WITH

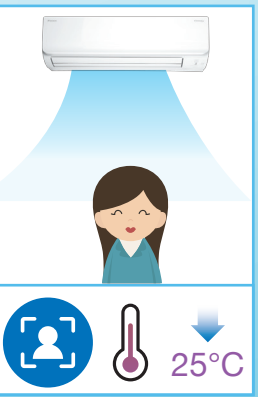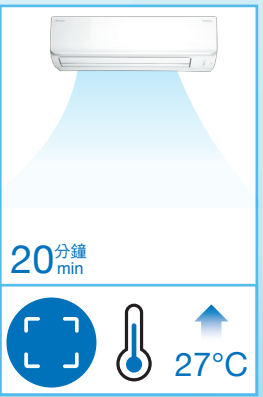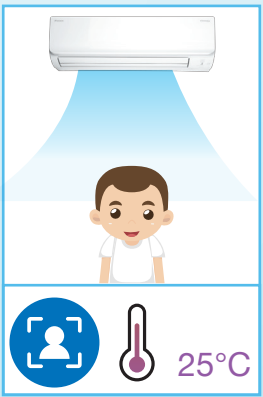


耐用的室外機熱交換器
SUPER DURABLE

採用大金的嶄新空氣調節技術，大大提升耐用性能
MORE DURABLE with Daikin leading air conditioning technology

電源不穩？
Unstable Power Supply?
COANDA系列配備超耐用電路，能應付高達440伏特的過高電壓。
The COANDA series is equipped with a highly durable electronic circuit which is able to handle overload voltage of up to 440V.

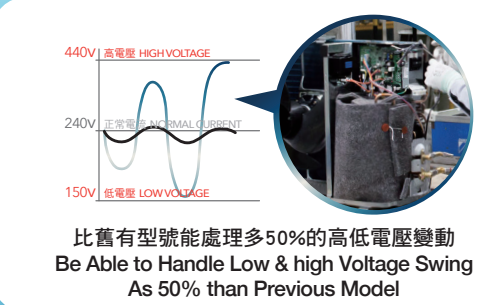

產品安裝於容易銹蝕的環境？
Product Installed In Corrosive Environment ?



室外機的熱交換器葉片經過特別防銹蝕處理，表面塗上壓克力樹脂塗層，更能抵抗酸雨和鹽腐蝕。
The outdoor unit's heat exchanger fins are processed using a special anti-corrosion treatment. The surface is covered with an acrylic resin layer to provide enhanced resistance to acid rain and salt corrosion.

